

"ALASKAN BIG FOOT"

~beach highbanker/dredge combo~

\$1,800.00 USD

Total weight:


120 lbs

Total dimension:

21" wide (at legs)

48" tall (max

**working height w/
raised legs)**

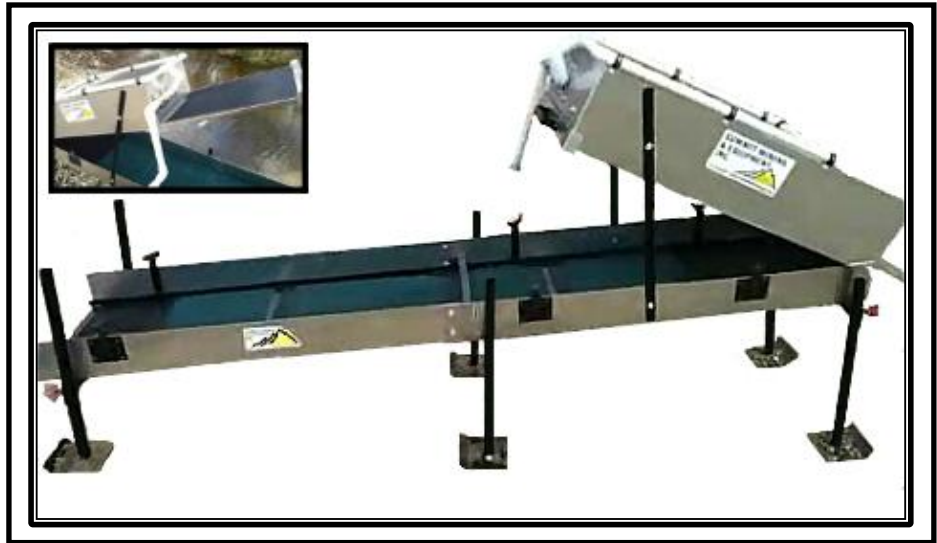

~Hopper: 40" x 18" x 9" ~Sluice box: 96" x 18" x 5" ~Legs/Feet: 24"/ 6-1/2" x 6-1/2"



ULTIMATE IN HEAVY SAND PROCESSING!

SET UP:

Raise the hopper head to the desired height, and slide bolt into the appropriate hole and tighten wing nut to secure in place. Raise unit and adjust legs to correct height and angle for sluice; from front to back and level from side to side. Hook up water supply and adjust water flow with shut-off valve, or attach dredge hose.

HOW IT WORKS.

As a Highbanker: material is placed into the hopper where the spray bars wash the material before being classified through the grizzly area and dropping into the sluice box. Once the material enters the sluice box it gets washed over the matting capturing the gold.

Processing a five gallon bucket should take about 2-4 minutes depending on the material.

In a Dredge configuration: simply rest (and secure) the dredge hose end on the cradle at the foot end of the hopper, allowing the material to get "pushed uphill" prior to settling down into the sluice box where the material is washed over the matting capturing the gold.



OUR MISSION: To make the gold prospecting experience more productive for small scale miners.



facebook.com/summitmining



youtube.com/summitmining

www.summitmining.com . sales@summitmining.com 208-362-0450